



USR-N520 Datasheet

2-Port Serial to Ethernet Converter

Build a Smarter IOT world, Your Trustworthy Partner

USR-N520 is 2-port serial to Ethernet converter. It adopts Cortex-M7 solution, which has a main frequency up to 400MHz, powerful performance, fast transmission speed, and high reliability. Equipped with a deeply optimized TCP/IP stack, built in hardware and software watchdog and a variety of keepalive mechanisms, USR-N520 keeps online all the time. It supports TCP Client, TCP Server, UDP Client, UDP Server and HTTPD Client working modes, achieves data transparent transmission via simple configuration.

✧ New Solution

New ARM core, Cortex-M7 solution, equipped with deeply optimized TCP/IP protocol stack. It has low latency and strong scalability, stable and reliable.

✧ Modbus Gateway

It supports Modbus TCP and Modbus RTU protocol mutual conversion, multi-host polling function.

✧ Industrial Grade Design

The device conforms to industrial design standards. Reliable EMC protection and -40~85°C operating temperature make it endure various complex industrial scenarios.

✧ Dual Sockets

Each serial port supports connecting to two different servers at the same time. Two sockets are mutually backed up, providing higher reliability and better flexibility.


Features

- Supports 2 serial ports working independently.
- Supports 5-36V wide voltage input, with reverse polarity protection.
- Supports connecting to Virtual COM Port Driver (USR-VCOM).
- Supports static IP and DHCP client.
- Supports Modbus RTU to Modbus TCP protocol conversion.
- Multiple hardware protection, ESD level4 (air±15KV, contact±8KV), Surge level3 (±2KV), EFT level3 (±2KV).
- Supports configuring parameters via built-in webpage.
- Supports upgrading firmware via built-in webpage and configuration software, more convenient.
- Supports keepalive mechanism to quickly detect the dead connections and reconnect.
- Supports hardware watchdog, automatically restarts when the device goes down.
- Supports websocket for bidirectional data transmission between a maximum of 16 websocket clients and any serial port.

- Supports serial and network AT commands.
- Supports UDP broadcast function.

Dimensions

Unit:mm

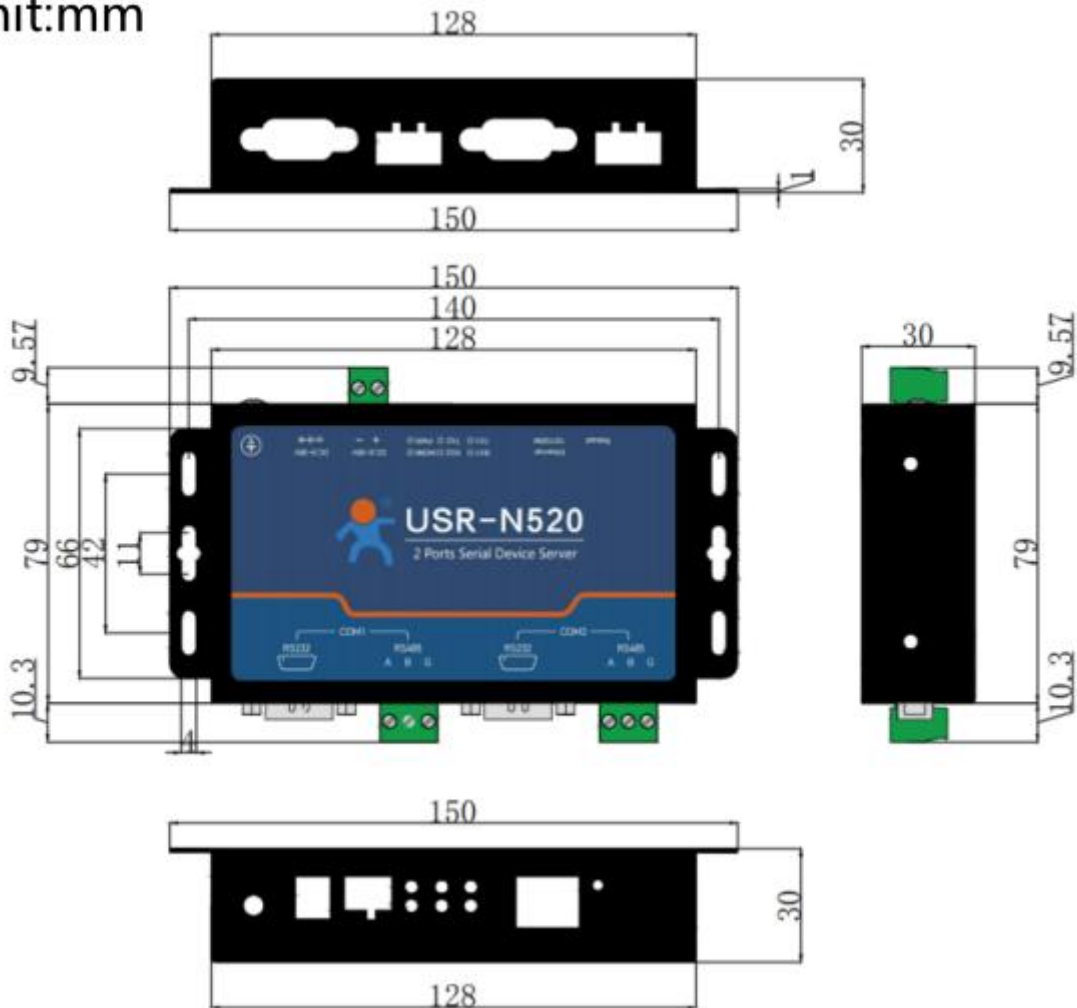

- Metal shell, panel mounting.
- Dimensions: 150*98.8*30 mm (L*W*H, including terminals and mounting ears)

Specifications

| Item | Parameter | Description |
|-----------------------------|----------------------------|--|
| Hardware Parameters | Input Voltage | DC 5.0~36.0V |
| | Input Current | 67mA @12V |
| | Dimensions | 150*98.8*30 mm (L*W*H, including terminals and mounting ears) |
| | Installation | Panel mounting |
| | Ground Screw | 1 |
| | Operating Temperature | -40~85℃ |
| | Storage Temperature | -40~105℃ |
| | Operating Humidity | 5%~95% RH(non-condensing) |
| | Storage Humidity | 5%~95% RH(non-condensing) |
| | Certifications | CE/FCC/ROSH |
| Interface Parameters | Ethernet Port Spec. | RJ45, 10/100Mbps, auto MDI/MDIX |
| | Ethernet Port No. | 1 |
| | Serial signals | RS-232: TxD, RxD, RTS, CTS, GND RS-422: Tx+, Tx-, Rx+, Rx-, GND RS-485-2w: A+, B-, GND |
| | Serial Port No. | 2 |
| | Serial Baud Rate | 600-230.4K(bps) |
| | Data Bit | 7, 8 |
| | Parity | None, Even, Odd |
| | Flow Control | None, RTS/CTS (RS-232 only), XON/XOFF |
| Hardware Protection | ESD-IEC61000-4-2 Level 4 | Air±15KV, contact±8KV |
| | Surge-IEC61000-4-5 level 3 | ±2KV |
| | EFT-IEC61000-4-4 Level 3 | ±2KV |
| | | |
| Software | Network Protocol | IP/TCP/UDP/ARP/ICMP/IPV4/DHCP/DNS |
| | IP Mode | Static IP, DHCP |
| | Modbus Gateway | Support |
| | Websocket | Support |
| | HTTP Client | Support |
| | UDP Broadcast | Support |
| | User Configuring | Setup utility, webpage, AT commands |

| | | |
|-------------------|------------------------|--|
| Parameters | Serial Packets Cache | Dynamic packet cache. For example: When the packet length is 10 byte, the serial port can cache 450 packets(4.5KB). When the packet length is 1460 bytes, the serial port can cache 10 packets(14.6KB). |
| | Ethernet Packets Cache | 48Kbyte |

Ordering Guide

| Model | Serial standards | Connector | Serial signals |
|---------------|-----------------------|---|--|
| USR-N520-H7 | RS232/RS485/R S422 | Standard DB9 male | RS232/485/422×1: RXD, TXD, GND, RTS, CTS,T+(A+), T-(B-), R+, R- |
| USR-N520-H7-6 | RS232/RS485 | RS232:Standard DB9 male RS485:3Pin industrial terminal | RS232: RXD, TXD, GND, RTS, CTS RS485:A+, B-,GND |

Purchase & Support

For more information please visit our websites:

- Official website: <https://pusr.com>
- Official shop: <https://shop.usriot.com>
- Technical support: <http://h.usriot.com/>