

MiTAC Panel PC System

P210-10AI

Product Guide

---


**Front View**



**Rear View**




## Bottom View

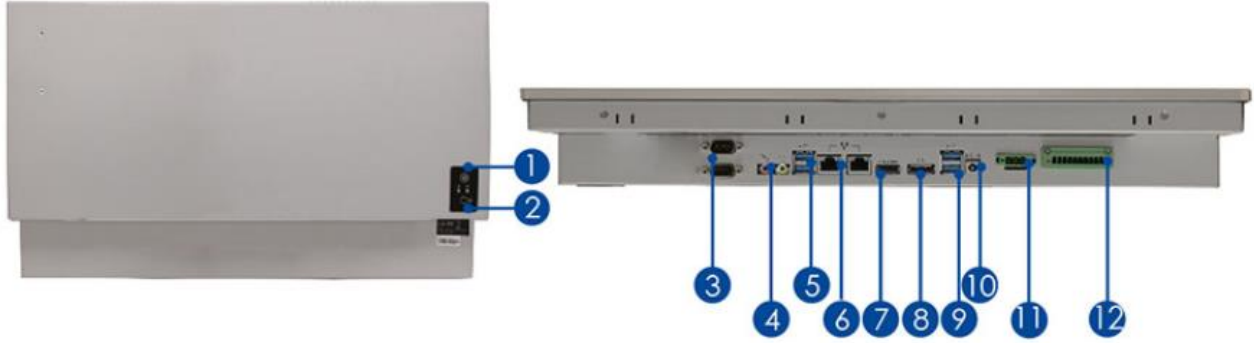

- |   |                    |   |               |    |                          |
|---|--------------------|---|---------------|----|--------------------------|
| 1 | ⏻ Power            | 5 | 🔌 USB 3.0     | 9  | 🔌 USB 3.0                |
| 2 | ⏻ Reset            | 6 | 🌐 Giga LAN    | 10 | ⚡ DC-in (DC Jack)        |
| 3 | ⌨️ COM             | 7 | 📺 HDMI        | 11 | ⚡ DC-in (terminal block) |
| 4 | 🎧 Mic-in, Line-out | 8 | 📺 DisplayPort | 12 | 🔌 8 bit GPIO             |

## Mechanical Dimension

P210-10AI dimension: 508.3mm x 308.4mm x 68mm

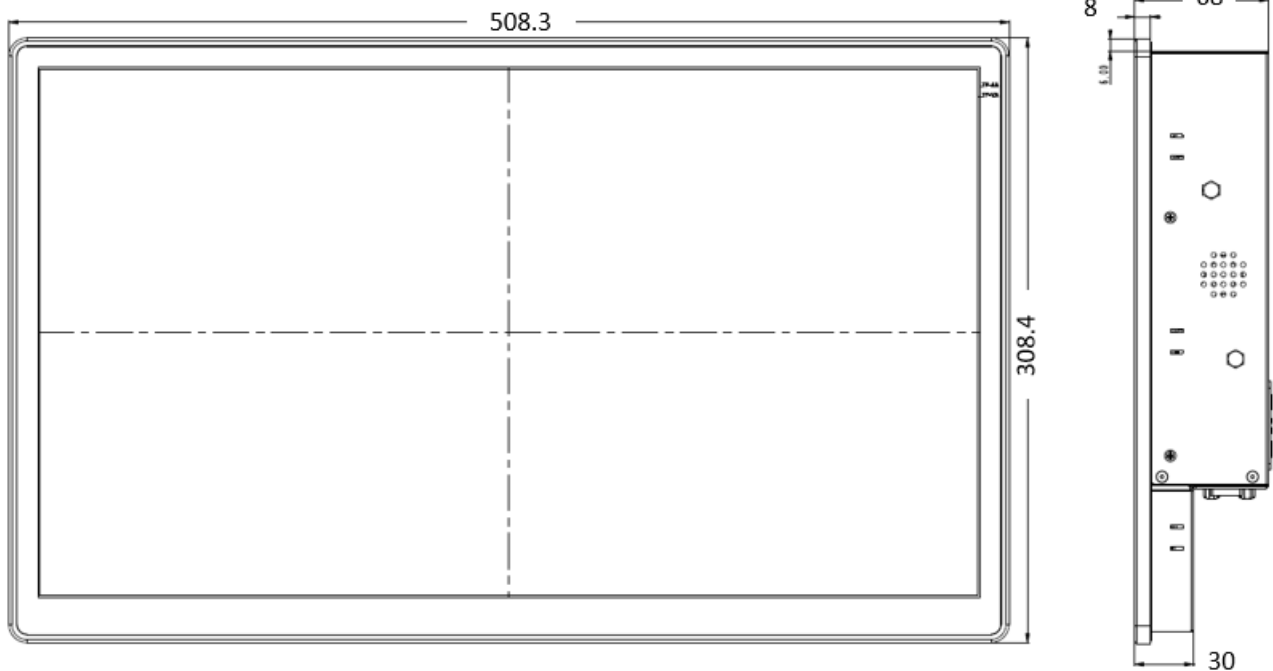



## Product Specifications

LCD	DISPLAY TYPE	21.5" TFT-LCD
	MAX. RESOLUTION	1920 x 1080
	MAX. COLORS	16.7M (8 bit / color)
	LUMINANCE (cd/m <sup>2</sup> )	250
	VIEWING ANGLE (H/V)	170° / 170°
	LED BACKLIGHT LIFETIME (hrs)	30,000
	HIGH BRIGHTNESS	Option
TOUCH SCREEN	TYPE	P-CAP
	TOUCH SCREEN	True-flat 10 points
	AR/AG	Option
SYSTEM	PROCESSOR	Intel® Apollo Lake-M N3350 Processor / Option: N4200

	CHIPSET	Intel® SoC Integrated
	SYSTEM MEMORY	DDR3L 1866 MHz / 2 x 204-pin SO-DIMM / Max. 8GB (Non-ECC)
	ETHERNET	2 x Intel® I211-AT Giga LAN
	I/O PORT	1 x 3-pin Phoenix type terminal block DC input / 2 x RS232 / 2 x RJ45 / 1 x 8bit GPIO terminal block / 1 x DisplayPort 1.2 / 1 x 2-pin remote power on/off / 1 x DC Jack / 4 x USB 3.0 / 1 x HDMI 1.4 / 1 x Line-out / 1 x Mic-in
	EXPANSION SLOT	1 x M.2 2280 B key / 1 x M.2 2230 E key(PCIe / USB)
	STORAGE	1 x SATA 2.5" HDD / SSD bay
	STEREO SPEAKER	2 x 2W
	OS SUPPORT	Windows® 10 enterprise 1703
	WATCHDOG TIMER	1~255 steps by software program
	POWER REQUIREMENT	POWER INPUT
POWER ADAPTER		AC to DC / DC19V / 3.4A / 65W adapter
MECHANICAL	MOUNTING	VESA 75/100mm / Panel Mount
	DIMENSIONS (W X D X H)	508.3 x 308.4 x 68 mm
	WEIGHT	TBD
ENVIRONMENTAL	OPERATING TEMPERATURE	-10~50°C (14 ~ 122°F)
	STORAGE TEMPERATURE	-20 ~ 60°C (-4 ~ 140°F)
	STORAGE HUMIDITY	10% ~ 90% @40°C non-condensing
	VIBRATION RESISTANCE	Operating Random vibration Test 5-500Hz, 0.3 Grms@with HDD / 2Grms @with SSD, follow IEC 60068-2-64
	SHOCK RESISTANCE	Operating 50 G peak (3 ms duration)

	EMC	CE / FCC Class B
	FRONT PANEL PROTECTION	IP65 Compliant


# Quick Installation Guide



Remove 10pcs rear cover screws.  
(Torque 4.5 +/-0.5 Kgf-cm)



Open rear cover

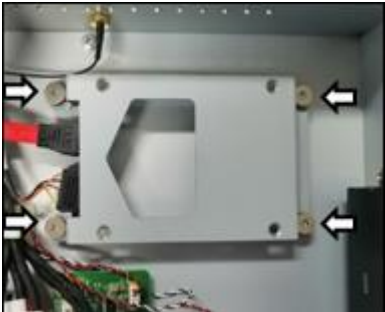

Disassemble the HDD bracket.  
(Torque 4.5 +/-0.5 Kgf-cm)



Install HDD with the screws in AK.  
(Torque 4.5 +/-0.5 Kgf-cm)



Install HDD bracket and connect the cables.

(Torque 4.5 +/-0.5 Kgf-cm)



Install SODIMMs



Install antennas in rear cover (option).

(Torque 4.5 +/-0.5 Kgf-cm)



Install WIFI card and connect the antennas. (option)

(Torque 4.5 +/-0.5 Kgf-cm)



Connect LVDS cable, backlight cable and TP cable before secure the rear cover





Remove the protection of thermal pad release paper before the assembly of rear cover



Secure 10pcs rear cover screws.  
(Torque 4.5 +/-0.5 Kgf-cm)

---

[Note] need manually install drivers

Please check the latest drivers on MiTAC official website

<http://www.mitacmct.com/IndustrialPanelPC=P210-10AI=P210-10AI=downloads=EN>

MITAC Embedded System

P210-10AI

BIOS Specification

---

# 1. Main Page

Main		Advanced	Chipset	Security	Boot	Save & Exit
<b>BIOS Information</b>						<b>Item help</b>
BIOS Vender			American Megatrends			
Core Version			5.12			
Compliance			UEFI 2.5; PI 1.4			
BIOS Version			D7670X03			
Build Date			11/07/2016			
<b>Processor Information</b>						
Genuine Intel® CPU @ 1.50GHz						
<b>SATA Devices</b>						→←: Select Screen
SATA Port0			[Not install]			↑↓: Select Item
SATA Port1			[Not install]			Enter: Select
<b>Memory Information</b>						+/- : Change Opt
Total Memory			8192 MB			F1: General Help
Memory speed			1600MHz			F2: Previous Values
System Language			[English]			F3: Optimized Defaults
						F4: Save & Reset
						ESC: Exit

System Date

[Mon, mm/dd/yyyy]

System Time

[hh:mm:ss]

Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.

Field Name	<b>BIOS Vender</b>
Default Value	AMI Megatrends
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Core Version</b>
Default Value	5.12
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Complacency</b>
Default Value	UEFI 2.5; PI 1.4
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>BIOS Version</b>
Default Value	Display the version of the BIOS
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Build Date</b>
------------	-------------------

Default Value	Display build time of the BIOS
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Processor Information</b>
Value	Display the installed CPU brand.
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>SATA port 0</b>
Value	Display the SATA device information  [Not install]
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>SATA port 1</b>
Value	Display the SATA device information  [Not install]
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Total Memory</b>
Value	Display the installed memory size.
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Memory Speed</b>
Default Value	Display the installed memory speed

Comment	This field is not selectable. There is no help text associated with it.
---------	---

Field Name	<b>System Language</b>
Default Value	[English]
Possible Value	[English]
Help	Choose the system default language

Field Name	<b>System Date</b>
Default Value	[xxx, mm dd yyyy]
Possible Value	[xxx, xx:xx:xxxx]
Help	Set the Date. Use Tab to switch between Date elements. Default Ranges: Year: 2005-2099 Months: 1-12 Days: dependent on month

Field Name	<b>System Time</b>
Default Value	[hh :mm :ss]
Possible Value	[xx :xx :xx]
Help	Set the Time. Use Tab to switch between Time elements.

## 2. Advanced Page

Main	Advanced	Chipset	Security	Boot	Save & Exit
LAN1				[Enable]	Item help
LAN2				[Enable]	
Wireless LAN RF				[Enable]	
Intel(R) I211 Gigabit Network Connection				-xx:xx:xx:xx:...	
Intel(R) I211 Gigabit Network Connection				-xx:xx:xx:xx:...	
Driver Health					
▶ ACPI Settings					
▶ SMART settings					
▶ NCT6104DSEC Super IO Configuration					
▶ NCT6793D Super IO Configuration					
▶ S5 RTC Wake Settings					
▶ CPU Configuration					
▶ Network Stack Configuration					
▶ Platform Trust Technology					
					→←: Select Screen ↑↓: Select Item Enter: Select +/- : Change Opt F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Reset ESC: Exit
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	<b>LAN1</b>
Default Value	Enabled
Possible Value	Disabled Enabled
Help	Enable/Disable LAN1

Field Name	<b>LAN2</b>
Default Value	Enabled
Possible Value	Disabled Enabled
Help	Enable/Disable LAN2

Field Name	<b>Wireless LAN RF</b>
Default Value	Enabled
Possible Value	Disabled Enabled
Help	Enable/Disable Wireless Lan RF

Field Name	<b>Intel(R) I211 Gigabit Network Connection -xx:xx:xx:xx:...</b>
Help	Configure Gigabit Ethernet device parameters

Field Name	<b>Intel(R) I211 Gigabit Network Connection -xx:xx:xx:xx:...</b>
Help	Configure Gigabit Ethernet device parameters

Field Name	<b>Driver Health</b>
------------	----------------------



Help	Provides Health Status for the Drivers/Controllers
------	--

Field Name	<b>ACPI Settings</b>
Help	System ACPI Parameters.
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>SMART Settings</b>
Help	System SMART settings.
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>NCT6104DSEC Super IO Configuration</b>
Help	System Super IO Chip Parameters.
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>NCT6793D Super IO Configuration</b>
Help	System Super IO Chip Parameters.
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>S5 RTC Wake Settings</b>
Help	Enable system to wake from S5 using RTC alarm
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>CPU Configuration</b>
Help	CPU Configuration Parameters.
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>Network Stack Configuration</b>
Help	Network stack Settings.
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>Platform Trust Technology</b>
Help	Platform Trust Technology
Comment	Press Enter when selected to go into the associated Sub-Menu.

## 2.2 Intel(R) I211 Gigabit Network Connection-xx:xx:xx:xx:...

Main	Advanced	Chipset	Security	Boot	Save & Exit
<p>▶ NIC Configuration</p> <p>Blink LEDs 0</p> <p>UEFI Driver Intel(R) PRO/1000 7.0</p> <p>Device Name Intel(R) I211 Gigabit.....</p> <p>Chip Type Intel i211</p> <p>PCI Device ID 1539</p> <p>PCI address 01:00:00</p> <p>Link Status [Disconnected]</p> <p>MAC Address 00:22:4D:B8:C3:48</p>					<p>Item help</p> <p>→←: Select Screen</p> <p>↑↓: Select Item</p> <p>Enter: Select</p> <p>+/- : Change Opt</p> <p>F1: General Help</p> <p>F2: Previous Values</p> <p>F3: Optimized Defaults</p> <p>F4: Save &amp; Reset</p> <p>ESC: Exit</p>
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	<b>NIC Configuration</b>
Help	Click to configure the network device port.
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>Blink LEDs</b>
------------	-------------------

Default Value	0
Possible Value	0~15
Help	Identify the physical network port by blinking the associated LED.

Field Name	<b>UEFI Driver</b>
Default Value	Intel(R) PRO/1000 7.0...
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Device Name</b>
Default Value	Intel (R) I211 Gigabit...
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Chip Type</b>
Default Value	Intel i211
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>PCI Device ID</b>
Default Value	1539
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>PCI Address</b>
Default Value	01:00:00
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Link Status</b>
------------	--------------------

Default Value	[Disconnected]
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>MAC Address</b>
Default Value	XX:XX:XX:XX:XX:XX
Comment	This field is not selectable. There is no help text associated with it.

## 2.2.1 NIC configuration

Main	Advanced	Chipset	Security	Boot	Save & Exit
<p>Link Speed [Auto Negotiated]</p> <p>Wake On Lan [Enable]</p>					<p>Item help</p>
					<p>→←: Select Screen</p> <p>↑↓: Select Item</p> <p>Enter: Select</p> <p>+/- : Change Opt</p> <p>F1: General Help</p> <p>F2: Previous Values</p> <p>F3: Optimized Defaults</p> <p>F4: Save &amp; Reset</p> <p>ESC: Exit</p>
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	<b>Link Speed</b>
Default Value	Auto Negotiated
Possible Value	Auto Negotiated 10 Mbps Half 10 Mbps Full

	100 Mbps Half 100 Mbps Full
Help	Specifies the port speed used for the selected boot protocol.

Field Name	<b>Wake On LAN</b>
Default Value	Enable
Possible Value	Enable Disable
Help	Enables the server to be powered on using an in-band magic packet.

### 2.3 Intel(R) I211 Gigabit Network Connection-xx:xx:xx:xx:...

Main	Advanced	Chipset	Security	Boot	Save & Exit
▶ NIC Configuration					Item help
Blink LEDS		0			
UEFI Driver		Intel(R) PRO/1000 7.0			
Device Name		Intel(R) I211 Gigabit.....			
Chip Type		Intel i211			→←: Select Screen
PCI Device ID		1539			↑↓: Select Item
PCI address		01:00:00			Enter: Select
					+/- : Change Opt
Link Status		[Disconnected]			F1: General Help
					F2: Previous Values

MAC Address	00:22:4D:B8:C3:48	<b>F3: Optimized Defaults</b> <b>F4: Save &amp; Reset</b> <b>ESC: Exit</b>
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.		

Field Name	<b>NIC Configuration</b>
Help	Click to configure the network device port.
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>Blink LEDS</b>
Default Value	0
Possible Value	0~15
Help	Identify the physical network port by blinking the associated LED.

Field Name	<b>UEFI Driver</b>
Default Value	Intel(R) PRO/1000 7.0...
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Device Name</b>
Default Value	Intel (R) I211 Gigabit...
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Chip Type</b>
Default Value	Intel i211
Comment	This field is not selectable. There is no help text associated with it.



Field Name	<b>PCI Device ID</b>
Default Value	1539
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>PCI Address</b>
Default Value	01:00:00
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Link Status</b>
Default Value	[Disconnected]
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>MAC Address</b>
Default Value	XX:XX:XX:XX:XX:XX
Comment	This field is not selectable. There is no help text associated with it.

### 2.3.1 NIC configuration

Main	Advanced	Chipset	Security	Boot	Save & Exit
<p>Link Speed [Auto Negotiated]</p> <p>Wake On Lan [Enable]</p>					<p>Item help</p>
					<p>→←: Select Screen</p> <p>↑↓: Select Item</p> <p>Enter: Select</p> <p>+/- : Change Opt</p> <p>F1: General Help</p> <p>F2: Previous Values</p> <p>F3: Optimized Defaults</p> <p>F4: Save &amp; Reset</p> <p>ESC: Exit</p>
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	<b>Link Speed</b>
Default Value	Auto Negotiated
Possible Value	Auto Negotiated 10 Mbps Half 10 Mbps Full

	100 Mbps Half 100 Mbps Full
Help	Specifies the port speed used for the selected boot protocol.

Field Name	<b>Wake On LAN</b>
Default Value	Enable
Possible Value	Enable Disable
Help	Enables the server to be powered on using an in-band magic packet.

## 2.4 Driver health

Main	Advanced	Chipset	Security	Boot	Save & Exit
▶ Intel(R) PRO/1000 7.3.20 PCI-E				Healthy	<b>Item help</b>
▶ Intel(R) PRO/1000 7.3.06 PCI-E				Healthy	
▶ Intel(R) PRO/1000 7.3.06 PCI-E				Healthy	
					→←: Select Screen ↑↓: Select Item Enter: Select +/- : Change Opt F1: General Help

	<p><b>F2: Previous Values</b></p> <p><b>F3: Optimized Defaults</b></p> <p><b>F4: Save &amp; Reset</b></p> <p><b>ESC: Exit</b></p>
<p>Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.</p>	

Field Name	<b>Intel(R) PRO/1000 7.3.20 PCI-E</b>
Help	Provides Health Status for the Drivers/Controllers
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>Intel(R) PRO/1000 7.3.06 PCI-E</b>
Help	Provides Health Status for the Drivers/Controllers
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>Intel(R) PRO/1000 7.3.06 PCI-E</b>
Help	Provides Health Status for the Drivers/Controllers
Comment	Press Enter when selected to go into the associated Sub-Menu.

2.4.1 Intel(R) PRO/1000 7.3.06 PCI-E

Main	Advanced	Chipset	Security	Boot	Save & Exit	
Controller 73999398 Child 0					Healthy	<b>Item help</b>
Intel(R) I211 Gigabit Network Connection					Healthy	
						→←: Select Screen ↑↓: Select Item Enter: Select +/- : Change Opt F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Reset ESC: Exit
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.						

Field Name	<b>Controller xxxxxxxx Child 0</b>
Help	Provides Health Status for the Drivers/Controllers
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Intel(R) I211 Gigabit Network Connection</b>
Help	Provides Health Status for the Drivers/Controllers
Comment	This field is not selectable. There is no help text associated with it.

### 2.4.2 Intel(R) PRO/1000 7.3.06 PCI-E

Main	Advanced	Chipset	Security	Boot	Save & Exit	
Controller 73999398 Child 0					Healthy	<b>Item help</b>
Intel(R) I211 Gigabit Network Connection					Healthy	
						→←: Select Screen ↑↓: Select Item Enter: Select +/- : Change Opt F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Reset ESC: Exit
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.						

Field Name	<b>Controller xxxxxxxx Child 0</b>
Help	Provides Health Status for the Drivers/Controllers
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Intel(R) I211 Gigabit Network Connection</b>
Help	Provides Health Status for the Drivers/Controllers
Comment	This field is not selectable. There is no help text associated with it.

## 2.5 ACPI Settings

Main	Advanced	Chipset	Security	Boot	Save & Exit
<b>ACPI Settings</b>					<b>Item help</b>
Enable	ACPI	Auto Configuration		[Disabled]	
Enable	Hibernation			[Enabled]	
ACPI Sleep State				[S3 (Suspend to RAM)]	
					→←: Select Screen ↑↓: Select Item Enter: Select +/- : Change Opt F1: General Help F2: Previous Values F3: Optimized Defaults

Field Name	Enable ACPI Auto Configuration
Default Value	[Disabled]
Possible Value	Enabled Disabled
Help	Enables or Disables BIOS ACPI Auto Configuration.

Field Name	Enable Hibernation
Default Value	[Enabled]
Possible Value	Enabled Disabled
Help	Enables or Disables System ability to Hibernate (OS/S4 Sleep State). This option may be not effective with some OS.

Field Name	ACPI Sleep State
Default Value	[S3 (Suspend to RAM)]
Possible Value	Suspend Disabled S3 (Suspend to RAM)
Help	Select the highest ACPI sleep state the system will enter when the SUSPEND button is pressed.



## 2.6 SMART Settings

Main	Advanced	Chipset	Security	Boot	Save & Exit
SMART Settings					Item help
SMART Self Test					[Disabled]
					→←: Select Screen ↑↓: Select Item Enter: Select +/- : Change Opt F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Reset ESC: Exit
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	SMART Self Test
Default Value	[Disabled]
Possible Value	Disabled Enabled
Help	Run SMART Self Test on all HDDs during POST.

## 2.7 NCT6104DSEC Super IO Configuration

Main	Advanced	Chipset	Security	Boot	Save & Exit
NCT6104DSEC Super IO Configuration					Item help
Super IO chip		NCT6104DSEC			
▶ Serial Port 1 Configuration"					
▶ Serial Port 2 Configuration"					
▶ Serial Port 3 Configuration"					
▶ Serial Port 4 Configuration"					
					→←: Select Screen ↑↓: Select Item Enter: Select +/- : Change Opt F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Reset ESC: Exit
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	Serial Port 1 Configuration"
Help	Set Parameters of Serial Port 1 (COMA)
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	Serial Port 2 Configuration"
Help	Set Parameters of Serial Port 2 (COMB)
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	Serial Port 3 Configuration"
Help	Set Parameters of Serial Port 3 (COMC)
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	Serial Port 4 Configuration"
Help	Set Parameters of Serial Port 4 (COMD)
Comment	Press Enter when selected to go into the associated Sub-Menu.

### 2.7.1 Serial port 1 Configuration

Main	Advanced	Chipset	Security	Boot	Save & Exit
Serial Port 1 Configuration					Item help
Serial Port					[Enabled]
Device Settings					IO=240h; IRQ=11;
					→←: Select Screen
					↑↓: Select Item
					Enter: Select
					+/- : Change Opt

	<b>F1: General Help</b> <b>F2: Previous Values</b> <b>F3: Optimized Defaults</b> <b>F4: Save &amp; Reset</b> <b>ESC: Exit</b>
<b>Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.</b>	

Field Name	<b>Serial Port</b>
Default Value	Enabled
Possible Value	Disabled Enabled
Help	Enable or Disable Serial Port (COM)

Field Name	<b>Device Settings</b>
Default Value	IO=240h; IRQ=11;
Comment	This field is not selectable. There is no help text associated with it.

### 2.7.2 Serial port 2 Configuration

<b>Main</b>	<b>Advanced</b>	<b>Chipset</b>	<b>Security</b>	<b>Boot</b>	<b>Save &amp; Exit</b>
Serial Port 2 Configuration					<b>Item help</b>
Serial Port		[Enabled]			
Device Settings		IO=250h; IRQ=11;			

	<p>→←: Select Screen</p> <p>↑↓: Select Item</p> <p>Enter: Select</p> <p>+/- : Change Opt</p> <p>F1: General Help</p> <p>F2: Previous Values</p> <p>F3: Optimized Defaults</p> <p>F4: Save &amp; Reset</p> <p>ESC: Exit</p>
<p>Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.</p>	

Field Name	<b>Serial Port</b>
Default Value	Enabled
Possible Value	Disabled Enabled
Help	Enable or Disable Serial Port (COM)

Field Name	<b>Device Settings</b>
Default Value	IO=250h; IRQ=11;
Comment	This field is not selectable. There is no help text associated with it.

## 2.7.3 Serial port 3 Configuration

Main	Advanced	Chipset	Security	Boot	Save & Exit
Serial Port 3 Configuration					Item help
Serial Port					[Enabled]
Device Settings					IO=258h; IRQ=11;
Com3 set to					[3T/5R RS-232]
					→←: Select Screen ↑↓: Select Item Enter: Select +/- : Change Opt F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Reset ESC: Exit
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	Serial Port
Default Value	Enabled
Possible Value	Disabled Enabled

Help	Enable or Disable Serial Port (COM)
------	-------------------------------------

Field Name	<b>Device Settings</b>
Default Value	IO=258h; IRQ=11;
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Com3 set to</b>
Default Value	3T/5R RS-232
Possible Value	1T/1R RS-422  3T/5R RS-232  1T/1R RS-485 TX ENABLE Low Active  1T/1R RS-485 TX ENABLE High Active  1T/1R RS-422 with termination resistor  1T/1R RS-232 co-exists with RS485  1T/1R RS-485 with termination resistor TX ENABLE Low Active  Disabled
Help	User Select Rs232 port config

## 2.7.4 Serial port 4 Configuration

Main	Advanced	Chipset	Security	Boot	Save & Exit
Serial Port 4 Configuration					Item help
Serial Port					[Enabled]
Device Settings					IO=260h; IRQ=11;
Com4 set to					[3T/5R RS-232]
					→←: Select Screen ↑↓: Select Item Enter: Select +/- : Change Opt F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Reset ESC: Exit
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	Serial Port
Default Value	Enabled
Possible Value	Disabled Enabled



Help	Enable or Disable Serial Port (COM)
------	-------------------------------------

Field Name	<b>Device Settings</b>
Default Value	IO=260h; IRQ=11;
Comment	This field is not selectable. There is no help text associated with it.

Field Name	<b>Com4 set to</b>
Default Value	3T/5R RS-232
Possible Value	1T/1R RS-422  3T/5R RS-232  1T/1R RS-485 TX ENABLE Low Active  1T/1R RS-485 TX ENABLE High Active  1T/1R RS-422 with termination resistor  1T/1R RS-232 co-exists with RS485  1T/1R RS-485 with termination resistor TX ENABLE Low Active  Disabled
Help	User Select Rs232 port config

## 2.8 NCT6793D Super IO Configuration

Main	Advanced	Chipset	Security	Boot	Save & Exit
NCT6793D Super IO Configuration					Item help
Serial Port 1			[Enabled]		
Serial Port 2			[Enabled]		
Parallel Port			[Enabled]		
Device Mode			[STD Printer Mode]		
					→←: Select Screen ↑↓: Select Item Enter: Select +/- : Change Opt F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Reset ESC: Exit
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	Serial Port 1
Default Value	[Enabled]

Possible Value	Enabled  Disabled
Help	Enable or Disable Serial Port (COM)

Field Name	Serial Port 2
Default Value	[Enabled]
Possible Value	Enabled  Disabled
Help	Enable or Disable Serial Port (COM)

Field Name	Parallel Port
Default Value	[Enabled]
Possible Value	Enabled  Disabled
Help	Enable or Disable Parallel Port (LPT/LPTE)
Comment	<b>SKU-S did not have Parallel port menu</b>

Field Name	Device Mode
Default Value	[STD Printer Mode]
Possible Value	STD Printer Mode  SPP Mode  EPP-1.9 and SPP Mode  EPP-1.7 and SPP Mode  ECP Mode  ECP-1.9 and SPP Mode

	ECP-1.7 and SPP Mode
Help	Change the Printer Port mode.
Comment	<b>SKU-S did not have Parallel port menu</b>

S5 RTC Wake Settings(No function when DeepSx Power Policies enabled)

Main	Advanced	Chipset	Security	Boot	Save & Exit	
Wake system from S5					[Disabled]	<b>Item help</b>  →←: Select Screen  ↑↓: Select Item  Enter: Select  +/- : Change Opt  F1: General Help  F2: Previous Values  F3: Optimized Defaults  F4: Save & Reset  ESC: Exit
Wake up hour					0	
Wake up minute					0	
Wake up second					0	
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.						

Field Name	Wake system from S5
Default Value	[Disabled]
Possible Value	Disabled

	Fixed Time  Dynamic Time
Help	Enabler or disable System wake on alarm event, Select FixedTime, system will wake on the hr::min::sec specified. Select DynamicTime , system will wake on the current time + Increase minute (s)

Field Name	Wake up hour(Show when Wake system from S5 set to Fixed Time)
Default Value	0
Possible Value	0-23
Help	Select 0-23 For example enter 3 for 3am and 15 for 3pm

Field Name	Wake up minute(Show when Wake system from S5 set to Fixed Time)
Default Value	0
Possible Value	0-59
Help	0 - 59

Field Name	Wake up second(Show when Wake system from S5 set to Fixed Time)
Default Value	0
Possible Value	0 - 59
Help	0 - 59

Field Name	Wake up minute increase(Show when Wake system from S5 set to Dynamic Time)
Default Value	1
Possible Value	1-5
Help	1 - 5

## 2.9 CPU Configuration

Main	Advanced	Chipset	Security	Boot	Save & Exit
<b>CPU Configuration</b>					<b>Item help</b>
Intel(R) Core(TM) CPU [CPU NAME] @ [CPU Freq.] GHz					
CPU Signature				406c3	
Microcode Patch				33c	
Max CPU Speed				1600 MHz	
Min CPU Speed				480 MHz	
Processor Cores				2	
Intel HT Technology				Not Supported	
Intel VT-x Technology				Supported	
L1 Data Cache				24 KB x 2	
L1 Code Cache				32 KB x 2	
L2 Cache				1024 KB x 1	
L3 Cache				Not Present	
64-bit				Supported	
Intel Virtualization Technology				[Enabled]	→←: Select Screen ↑↓: Select Item Enter: Select

	<b>+/- : Change Opt</b>  <b>F1: General Help</b>  <b>F2: Previous Values</b>  <b>F3: Optimized Defaults</b>  <b>F4: Save &amp; Reset</b>  <b>ESC: Exit</b>
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.	

Field Name	CPU Configuration
Default Value	[Intel CPU Brand String]
Comment	This field is not selectable. There is no help text associated with it.

Field Name	CPU Signature
Default Value	Displays CPU Signature
Comment	This field is not selectable. There is no help text associated with it.

Field Name	Microcode Patch
Default Value	CPU Microcode Patch Revision
Comment	This field is not selectable. There is no help text associated with it.

Field Name	Max CPU Speed
Default Value	Displays the Max CPU Speed
Comment	This field is not selectable. There is no help text associated with it.



Field Name	Min CPU Speed
Default Value	Displays the Min CPU Speed
Comment	This field is not selectable. There is no help text associated with it.

Field Name	Processor Cores
Default Value	Displays number of cores.
Comment	This field is not selectable. There is no help text associated with it.

Field Name	Intel HT Technology
Default Value	When Hyper-threading is enabled, 2 logical CPUs per core is present.
Comment	This field is not selectable. There is no help text associated with it.

Field Name	Intel VT-x Technology
Default Value	CPU VMX hardware support for virtual machines.
Comment	This field is not selectable. There is no help text associated with it.

Field Name	64-bit
Default Value	Displays if 64-bit supported
Comment	This field is not selectable. There is no help text associated with it.

Field Name	L1 Data Cache
Default Value	L1 Data Cache Size
Comment	This field is not selectable. There is no help text associated with it.

Field Name	L1 Code Cache
------------	---------------

Default Value	L1 Code Cache Size
Comment	This field is not selectable. There is no help text associated with it.

Field Name	L2 Cache
Default Value	L2 Cache Size
Comment	This field is not selectable. There is no help text associated with it.

Field Name	L3 Cache
Default Value	L3 Cache Size
Comment	This field is not selectable. There is no help text associated with it.

Field Name	Intel Virtualization Technology
Default Value	[Enabled]
Possible Value	Enabled  Disabled
Help	When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology

## 2.10 Network Stack Configuration

Main	Advanced	Chipset	Security	Boot	Save & Exit
<p>Network stack [Enabled]</p> <p>Ipv4 PXE Support [Enabled]</p> <p>Ipv6 PXE Support [Enabled]</p>					<p><b>Item help</b></p> <p>→←: Select Screen</p> <p>↑↓: Select Item</p> <p>Enter: Select</p> <p>+/- : Change Opt</p> <p>F1: General Help</p> <p>F2: Previous Values</p> <p>F3: Optimized Defaults</p> <p>F4: Save &amp; Reset</p> <p>ESC: Exit</p>
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	Network stack
Default Value	[Enabled]
Possible Value	Disabled Enabled
Help	Enable/Disable UEFI network stack.

Field Name	Ipv4 PXE Support
------------	------------------

Default Value	[Enabled]
Possible Value	Disabled Enabled
Help	Enable Ipv4 PXE Boot Support. If disabled IPV4 PXE boot option will not be created.

Field Name	Ipv6 PXE Support
Default Value	[Enabled]
Possible Value	Disabled Enabled
Help	Enable Ipv6 PXE Boot Support. If disabled IPV6 PXE boot option will not be created.

## 2.11 Trust Platform technology

Main	Advanced	Device	Chipset	Security	Boot	Save & Exit
TPM Configuration						Item help
fTPM				[Enabled]		

→←: Select Screen

↑↓: Select Item

Enter: Select

+/- : Change Opt

F1: General Help

F2: Previous Values

F3: Optimized Defaults

F4: Save & Reset

ESC: Exit

Field Name	Compatibility Support Module Configuration
------------	--

Field Name	fTPM Support
Default Value	[Enabled]
Possible Value	Disabled/Enabled
Help	Enable/Disable fTPM

### 3. Chipset

Main	Advanced	Chipset	Security	Boot	Save & Exit
Restore AC Power Loss				[Power Off]	<b>Item help</b>          <b>→←: Select Screen</b>  <b>↑↓: Select Item</b>  <b>Enter: Select</b>  <b>+/- : Change Opt</b>  <b>F1: General Help</b>  <b>F2: Previous Values</b>  <b>F3: Optimized Defaults</b>  <b>F4: Save &amp; Reset</b>  <b>ESC: Exit</b>
DeepSx Power Policies				[Disabled]	
Output Panel Type				[Disable]	
Front Panel Audio				[Auto]	
DVMT Pre-Allocated				[64M]	
DVMT Total Gfx Mem				[256MB]	
Wake On Lan				[Enable]	
OS Selection				[Windows]	
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	Restore AC Power State
------------	------------------------

Default Value	[Power Off]
Possible Value	Power off Power on Last State
Help	Select AC power state when power is re-applied after a power failure.

Field Name	DeepSx Power Policies
Default Value	Disabled
Possible Value	Disabled Enabled
Help	Configure the DeepSx Mode configuration.
Note	When enabled, "Wake On Lan" and "S5 RTC Wake Settings" are no function.

Field Name	Output Panel Type
Default Value	Disable
Possible Value	LVDS eDP Disabled
Help	Select Output Panel Type

Field Name	LVDS Panel Type
Default Value	VBIOS Default
Possible Value	VBIOS Default 1024x768      LVDS

	1366x768      LVDS 1680x1050    LVDS 1440x900     LVDS 1600x900     LVDS 1280x800     LVDS 1920x1080    LVDS
Help	Select LVDS panel used by Internal Graphics Device by selecting the appropriate setup item.
Comment	<b>This field only show when Output Panel Type set to LVDS</b>

Field Name	Front Panel Audio
Default Value	High Definition Front Panel
Possible Value	High Definition Front Panel  Disabled
Help	Automatically or Manually select the type of audio front panel installed.

Field Name	DVMT Pre-Allocated
Default Value	[64M]
Possible Value	64M /96M /128M /160M /192M /224M /256M /288M /320M  352M /384M /416M /448M /480M /512M
Help	Select DVMT 5.0 Pre-Allocated (Fixed) Graphics Memory size used by the Internal Graphics Device.

Field Name	DVMT Total Gfx Mem
------------	--------------------



Default Value	[256MB]
Possible Value	128MB /256MB /Max
Help	Select DVMT 5.0 Total Graphic Memory size used by the Internal Graphics Device.

Field Name	Wake On Lan
Default Value	Enabled
Possible Value	Disabled Enabled
Help	Enable or Disable the Wake on Lan

Field Name	OS Selection
Default Value	Windows
Possible Value	Windows Intel Linux
Help	Select the target OS.

## 4. Security

Main	Advanced	Chipset	Security	Boot	Save & Exit
<p><b>Password Description</b></p> <p>If Only the Administrator's password is set then this only limits access to Setup and is only asked for when entering Setup</p> <p>If ONLY the User's password is set, then this Is a power on password and must be entered to boot or enter Setup. In Setup the User will have Administrator rights.</p> <p>The password length must be in the following range:</p> <p>Minimum Length 3</p> <p>Maximum Length 20</p> <p><a href="#">Setup Administrator Password</a></p> <p><a href="#">User Password</a></p> <p>HDD Security Configuration</p> <p><a href="#">P0:Device Name</a></p> <p><a href="#">▶ Secure Boot</a></p>				<p><b>Item help</b></p> <p>→←: Select Screen</p> <p>↑↓: Select Item</p> <p>Enter: Select</p> <p>+/- : Change Opt</p> <p>F1: General Help</p> <p>F2: Previous Values</p> <p>F3: Optimized Defaults</p> <p>F4: Save &amp; Reset</p> <p>ESC: Exit</p>	

Field Name	Setup Administrator Password
Help	Set Administrator Password
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	User Password
Help	Set User Password.
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	<b>P0: Device Name</b>
Help	HDD Security Configuration for selected drive
Comment	Press Enter when selected to go into the associated Sub-Menu.

Field Name	Secure Boot
Help	Customizable Secure Boot settings.
Comment	Press Enter when selected to go into the associated Sub-Menu.

## 4.1 HDD Security Configuration

Main	Advanced	Chipset	Security	Boot	Save & Exit
HDD Password Description				<b>Item help</b>	
<p>Allow Access to Set, Modify and Clear</p> <p>Hard Disk User and Master Password.</p> <p>User Password need to be installed for</p> <p>Enabling Security. Master Password can</p> <p>Be Modified only when successfully unlocked</p> <p>With Master Password in POST.</p> <p>HDD PASSWORD CONFIGURATION:</p>					
Security Supported	:		Yes	→←: Select Screen	
Security Enabled	:		No	↑↓: Select Item	
Security Locked	:		No	Enter: Select	
Security Frozen	:		No	+/- : Change Opt	
HDD User Pwd Status			NOT INSTALLED	<b>F1: General Help</b> <b>F2: Previous Values</b> <b>F3: Optimized Defaults</b> <b>F4: Save &amp; Reset</b> <b>ESC: Exit</b>	
<a href="#">Set User Password</a>					

Field Name	Set User Password
Help	Set HDD User Password
Comment	Press Enter when selected to go into the associated Sub-Menu.

## 4.2 Secure Boot Mode

Main	Advanced	Chipset	Security	Boot	Save & Exit
					<b>Item help</b>
System Mode					Setup
Secure Boot					Not Active
Vendor Keys					Not Active
Attempt Secure Boot					[Enabled]
▶ Enter Audit Mode					→←: Select Screen
▶ Enter Deployed Mode					
Secure Boot Mode					[Standard]
▶ Key Management					↑↓: Select Item
					Enter: Select
					+/- : Change Opt
					F1: General Help

	<b>F2: Previous Values</b>  <b>F3: Optimized Defaults</b>  <b>F4: Save &amp; Reset</b>  <b>ESC: Exit</b>
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.	

**Note:**

Security boot will not effect by load default.

Field Name	System Mode
Default Value	Deployed
Possible Value	Deployed /User/Audit/Setup
Comment	<p>This field is not selectable. There is no help text associated with it.</p> <p>Depend on use select .If Secure Boot Mode → set to customized →</p> <p>Key Management → Reset to Setup Mode system will back to setup</p>

Field Name	Secure Boot
Default Value	Not Active
Comment	This field is not selectable. There is no help text associated with it.

Field Name	Vendor Keys
Default Value	Not Active
Comment	This field is not selectable. There is no help text associated with it.

Field Name	Attempt Secure Boot
Default Value	[Enabled]

Possible Value	Enabled / Disabled
Help	Secure Boot activated when Platform Key(PK) is enrolled, System mode is User/Deployed, and CSM function is disabled

Field Name	Enter Audit Mode
Possible Value	Yes / No
Help	Enter Audit Mode.If a current System Mode is User – PK variable will be <u>erased</u> on transition to Audit
Comment	This filed only show when Secure Boot mode change from Customized to Standard.And if user need to into Auidt mode , “Secure Boot mode“ need to be Customized then will be effective.

Field Name	Enter Deployment mode
Help	Enter Deployment mode
Comment	This filed only show when Secure Boot mode change from Customized to Standard.

Field Name	Secure Boot Mode
Default Value	[Standard]
Possible Value	Standard / Custom
Help	Secure Boot Mode - Custom & Standard, Set UEFI Secure Boot Mode to STANDARD mode or CUSTOM mode, this change is effect after save. And after reset, the mode will return to STANDARD mode

Field Name	Key Management
Help	Enables experienced users to modify Secure Boot variables without full authentication.
Comment	After Select Secure Boot Mode:[Customer]

	Press Enter when selected to go into the associated Sub-Menu.
--	---



## 4.3 Key Management

Main	Advanced	Chipset	Security	Boot	Save & Exit	
Provision Factory Default Keys				[Disabled]		
				Item	help	
▶ Install Factory Default Keys						
▶ Save All Secure Boot Variables						
Secure Boot variable				size	key#	key source
▶ Platform Key(PK)				0	0	
▶ Key Exchange Key				0	0	
▶ Authorized Signatures				0	0	
▶ Forbidden Signatures				0	0	
▶ Authorized TimeStamps				0	0	
▶ OsRecovery Signatures				0		0
				→←: Select Screen		
				↑↓: Select Item		
				Enter: Select		
				+/- : Change Opt		
				F1: General Help		
				F2: Previous Values		

	<b>F3: Optimized Defaults</b>  <b>F4: Save &amp; Reset</b>  <b>ESC: Exit</b>
<b>Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.</b>	

Field Name	Provision Factory Default Key
Default Value	[Disabled]
Possible Value	Enabled  Disabled
Help	Allow to provision factory default Secure Boot keys when System is in Setup Mode

Field Name	Install Factory Default Key
Help	Force System to User Mode - install all Factory Default keys
Comment	Provision Factory Default keys set to "Enable"

Field Name	Reset to Setup Mode
Help	Force System to Setup Mode - clear all Secure Boot Variables
Comment	Provision Factory Default keys set to "Disable"

Field Name	Save All Secure Boot Variables
Help	Save NVRAM content of Secure Boot policy variables to the files (EFI_SIGNATURE_LIST data format) in root folder on a target file system

	device
--	--------

Field Name	Platform Key (PK) : 0 0
Possible Value	Set New Key  Append Key
Help	Enroll Factory Defaults or load keys from a file formatted as: 1.Public Key Certificate in: a)EFI_SIGNATURE_LIST, b)EFI_CERT_X509 (DER encoded), c)EFI_CERT_RSA2048 (bin), d)EFI_CERT_SHA256 (bin) 2.Authenticated UEFI Variable Key origin legend: Factory Default, Custom, Mixed * user modified via the Setup

Field Name	Key Exchange Key : 0 0
Possible Value	Set New Key  Append Key
Help	Enroll Factory Defaults or load keys from a file formatted as: 1.Public Key Certificate in: a)EFI_SIGNATURE_LIST, b)EFI_CERT_X509 (DER encoded), c)EFI_CERT_RSA2048 (bin), d)EFI_CERT_SHA256 (bin) 2.Authenticated UEFI Variable Key origin legend: Factory Default, Custom, Mixed * user modified via the Setup

Field Name	Forbidden Signature : 0 0
Possible Value	Set New Key  Append Key
Help	Enroll Factory Defaults or load keys from a file formatted as: 1.Public Key Certificate in: a)EFI_SIGNATURE_LIST, b)EFI_CERT_X509 (DER encoded), c)EFI_CERT_RSA2048 (bin), d)EFI_CERT_SHA256 (bin) 2.Authenticated UEFI Variable Key origin legend: Factory Default, Custom, Mixed * user modified via the Setup

Field Name	Authorized Signature : 0 0
Possible Value	Set New Key

	Append Key
Help	Enroll Factory Defaults or load keys from a file formatted as: 1.Public Key Certificate in: a)EFI_SIGNATURE_LIST, b)EFI_CERT_X509 (DER encoded), c)EFI_CERT_RSA2048 (bin), d)EFI_CERT_SHA256 (bin) 2.Authenticated UEFI Variable Key origin legend: Factory Default, Custom, Mixed * user modified via the Setup

Field Name	Authorized TimeStamps : 0 0
Possible Value	Set New Key  Append Key
Help	Enroll Factory Defaults or load keys from a file formatted as: 1.Public Key Certificate in: a)EFI_SIGNATURE_LIST, b)EFI_CERT_X509 (DER encoded), c)EFI_CERT_RSA2048 (bin), d)EFI_CERT_SHA256 (bin) 2.Authenticated UEFI Variable Key origin legend: Factory Default, Custom, Mixed * user modified via the Setup

Field Name	OsRecovery Signatures : 0 0
Possible Value	Set New Key  Append Key
Help	Enroll Factory Defaults or load keys from a file formatted as: 1.Public Key Certificate in: a)EFI_SIGNATURE_LIST, b)EFI_CERT_X509 (DER encoded), c)EFI_CERT_RSA2048 (bin), d)EFI_CERT_SHA256 (bin) 2.Authenticated UEFI Variable Key origin legend: Factory Default, Custom, Mixed * user modified via the Setup

## 5. Boot

Main	Advanced	Chipset	Boot	Security	Save & Exit
<b>Boot Configuration</b>					<b>Item help</b>
	Setup Prompt Timeout		3		
	Bootup NumLock State		[On]		
	Fast Boot		[Enable]		
	Boot mode select		[UEFI]		
<b>FIXED BOOT ORDER Priorities</b>					
	Boot Option #1		[Hard Disk]		
	Boot Option #2		[CD/DVD]		
	Boot Option #3		[USB Hard Disk]		
	Boot Option #4		[USB CD/DVD]		
	Boot Option #5		[USB Key]		
	Boot Option #6		[USB Floppy]		
	Boot Option #7		[Network]		
	UEFI CD/DVD ROM Drive BBS Priorities				→←: Select Screen
	UEFI Hard Disk Drive BBS Priorities				↑↓: Select Item
	UEFI NETWORK Drive BBS Priorities				Enter: Select
	UEFI USB CD/DVD ROM Drive BBS Priorities				+/- : Change Opt
					F1: General Help
					F2: Previous Values

UEFI USB Hard Disk Drive BBS Priorities	<b>F3: Optimized Defaults</b>
UEFI USB KEY Drive BBS Priorities	
	<b>F4: Save &amp; Reset</b>
	<b>ESC: Exit</b>
<b>Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.</b>	

Field Name	<b>Setup Prompt Timeout</b>
Default Value	3
Possible Value	1~65535
Help	Number of seconds to wait for setup activation key. 65535(0xFFFF) means indefinite waiting.

Field Name	<b>Boot NumLock State</b>
Default Value	[On]
Possible Value	On  Off
Help	Select the keyboard NumLock state

Field Name	<b>Fast Boot</b>
Default Value	[Enabled]
Possible Value	Enabled  Disabled
Help	Enable or Disable FastBoot features. Most probes are skipped to reduce time cost during boot.

Field Name	<b>Boot mode select</b>
------------	-------------------------

Default Value	[UEFI]
Possible Value	UEFI
Help	Select boot mode UEFI.

**Boot mode select = UEFI**

Field Name	<b>Boot Option #1</b>
Default Value	[Hard Disk]
Possible Value	CD/DVD, Hard Disk, Network, USB CD/DVD, USB Hard Disk, USB KEY, USB Floppy, USB Lan
Help	Set the system boot order

Field Name	<b>Boot Option #2</b>
Default Value	[CD/DVD]
Possible Value	CD/DVD, Hard Disk, Network, USB CD/DVD, USB Hard Disk, USB KEY, USB Floppy, USB Lan
Help	Set the system boot order

Field Name	<b>Boot Option #3</b>
Default Value	[USB Hard Disk]
Possible Value	CD/DVD, Hard Disk, Network, USB CD/DVD, USB Hard Disk, USB KEY, USB Floppy, USB Lan
Help	Set the system boot order

Field Name	<b>Boot Option #4</b>
Default Value	[USB CD/DVD]

Possible Value	CD/DVD, Hard Disk, Network, USB CD/DVD, USB Hard Disk, USB KEY, USB Floppy, USB Lan
Help	Set the system boot order

Field Name	<b>Boot Option #5</b>
Default Value	[USB Key]
Possible Value	CD/DVD, Hard Disk, Network, USB CD/DVD, USB Hard Disk, USB KEY, USB Floppy, USB Lan
Help	Set the system boot order

Field Name	<b>Boot Option #6</b>
Default Value	[USB Floppy]
Possible Value	CD/DVD, Hard Disk, Network, USB CD/DVD, USB Hard Disk, USB KEY, USB Floppy, USB Lan
Help	Set the system boot order

Field Name	<b>Boot Option #7</b>
Default Value	[Network]
Possible Value	CD/DVD, Hard Disk, Network, USB CD/DVD, USB Hard Disk, USB KEY, USB Floppy, USB Lan
Help	Set the system boot order



## 6. Save & Exit

Main	Advanced	Chipset	Security	Boot	Save & Exit
Save Options					<b>Item help</b>
Save Changes and Exit					
Discard Changes and Exit					
Save Changes and Reset					
Discard Changes and Reset					
Restore Defaults					
					<b>→←: Select Screen</b>
					<b>↑↓: Select Item</b>
					<b>Enter: Select</b>
					<b>+/- : Change Opt</b>
					<b>F1: General Help</b>
					<b>F2: Previous Values</b>
					<b>F3: Optimized Defaults</b>
					<b>F4: Save &amp; Reset</b>
					<b>ESC: Exit</b>
Version 2.18.1263. Copyright (C) 2017 American Megatrends, Inc.					

Field Name	Save Options
------------	--------------

Field Name	Save Changes and Exit
Help	Exit system setup after saving the changes.

Field Name	Discard Changes and Exit
Help	Exit system setup without saving any changes.

Field Name	Save Changes and Reset
Help	Reset the system after saving the changes.

Field Name	Discard Changes and Reset
Help	Reset system setup without saving any changes.

Field Name	Restore Defaults
Help	Restore/Load Default values for all the setup options.