

## WALL BLACK

2 Slot PCI

FANLESS Opzionale

Dimensioni ridotte con una robustezza assicurata




- INTEL® Q67 Express chipset
- Support Intel LGA 1155 Socket Core i3, i5, i7 & Pentium Processors
- Dual Channel DDR3-1333/1066 up to 8GB
- Intel 82579LM Gigabit LAN
- Intel Active Management Technology ( iAMT 7.0)
- PCI Express x16 Slot
- Integrated 24-bit Dual Channel LVDS
- 4-port SATAII 3Gb/s & 2-port SATA III 6Gb/s with RAID 0, 1, 5, 10 & JBOD Support
- HDMI, and VGA Video Outputs
- Built-in Watchdog Timer Technology

## Descrizione

PC Industriale Wallmount di colore nero, case rinforzato che garantisce una robustezza e una dissipazione abbondante grazie anche alla possibilità di installare un'ulteriore ventola interna. Sistema espandibile con due slot PCI.

Tutte le porte e le interfacce sono presenti su un unico lato: alimentazione, tasto di avvio, power led e hard disk led, I/O shield e due porte USB.

Configurazione standard modello Wall Black

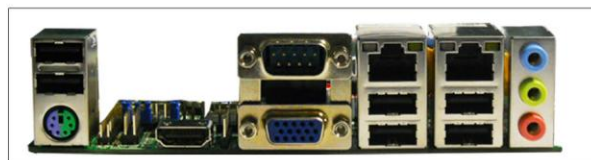

## Caratteristiche tecniche

Configurazione standard modello Wall Black

Form Factor	MINI ITX Form Factor Motherboard
CPU	INTEL® LGA 1155 Socket Core i7/i5/i3/Pentium Processor
Memory	2 * 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 8GB
Chipset	INTEL® Q67 Chipset ( Clock 100 MHz)
Power Management	N/A
Serial ATA Interface	2 * Serial ATA3 6Gb/s & 4 * Serial ATA2 3Gb/s connectors support RAID 0, 1, 5, 10
VGA Interface	N/A
LVDS	24 bits Dual Channel LVDS
Video Memory	N/A
Audio Interface	VIA VT1705 6-Channel HD Audio CODEC
LAN Interface	1 * Intel 82579LM PCI-E Gigabit Ethernet LAN
Extended Interface	1 *PCIe x 16 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports CPU /NB / Chassis Fan connectors 1 * GPIO header
Internal I / O Port	1 * COM header(RS232/422/485) 1 * IR header 1 * Chassis Intrusion header 1 * AUDIO header 1 * 24-pin & 4-pin 12V ATX Power connector 6 * USB 2.0/1.1 ports 1 * PS2/KB Connector
External I / O Port	1 * RJ-45 port 1 * HDMI port 1 * COM port 1 * VGA port 3 * Audio Phone Jack
BIOS	AMI EFI 64MB SMT Flash ROM
Power Requirement	Standard 24-Pin & 8-pin 12V ATX Power supply
Dimension	170mm x 170mm
Temperature	Operating within 0~60 centigrade Storage within -20-85 centigrade

SU RICHIESTA formuliamo personalizzazioni del prodotto

### Dati per l'ordine

#### INFORMAZIONI PER L'ORDINE

Indicare:  
 - Processore, RAM, capienza disco rigido e tipologia  
 (Hard Disk 2,5"/3,5", disco stato solido)  
 - Numero e tipo di interfacce opzionali.  
 - Il sistema operativo da preinstallare.