



# DEVICENET COMPACT PCI INTERFACE CARD



## Overview

The SST DeviceNet Compact PCI interface card connects your Compact PCI bus computer to DeviceNet.

## Applications

Many third party software programs support the SST DeviceNet interface card for various applications including:


- Operator Interface and HMI
- PC Control
- Network Configuration, Troubleshooting and Diagnostics
- I/O Emulation
- Device Development

## Features

- Entire DeviceNet Protocol is executed in hardware
- UCMM capable, Group 1, 2, and 3 dynamic explicit connections supported
- Simultaneous execution of Group 2 Client (master) and Server (slave) operation
- All DeviceNet standard baud rates supported: 125, 250, and 500 Kbaud
- Full DeviceNet implementation including Change of State (COS) and explicit messaging
- DeviceNet compliance is ensured at the card level for I/O scanner and device applications

## Custom Driver Development

SST provides an open documented memory map interface with example C source code and Windows 32-Bit DLLs and drivers.

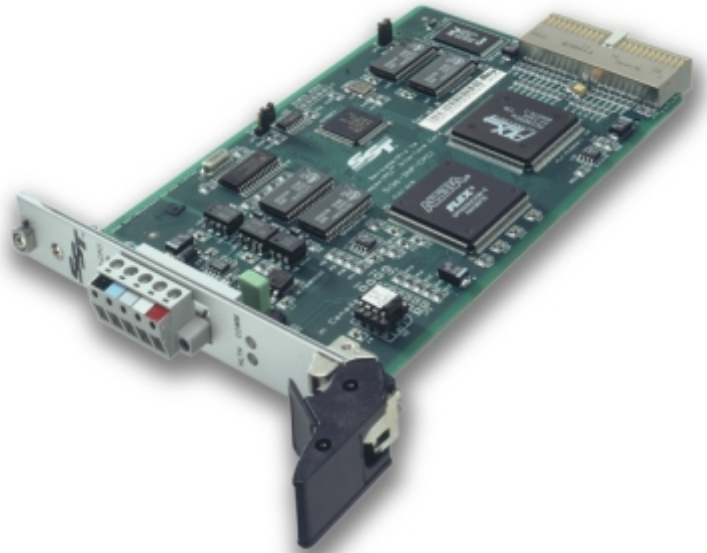

### ***Included with SST DeviceNet Compact PCI Interface Card***

- DeviceNet Network Analyzer and Monitor Diagnostic Software Tools
- DeviceNet Node Commissioning Tool
- OPC Server
- Custom driver development software
- Microsoft Windows 2000/NT/XP drivers/DLLs
- 24/7 Global technical support

**DeviceNet**  
CONFORMANCE TESTED



**Network Interface Cards**

[www.mySST.com](http://www.mySST.com)

## Hardware Specifications

- 32 bit, 3U Compact PCI interface card
- 256 Kbytes shared RAM (16 Kbytes host interface window)
- High performance 40 MHz processor with 512 Kbytes RAM, 512 Kbytes Flash
- PCI BIOS configurable interrupt support
- DeviceNet compatible 5-pin DeviceNet connector
- DeviceNet compatible network status bicolor indicator
- Plug and play drivers included
- Supports connection to non-powered (3 wire) CAN networks with external 12-24 VDC supply
- Compatible with CAN specification 2.0 part A
- Supports CAN data rates up to 1 Mbaud
- Supports all standard DeviceNet data rates: 125, 250, and 500 Kbaud
- Multiple cards can be configured in the same computer
- 500 V optically isolated CAN interface
- Operational temperature: 0 to 50 C (32 to 122°F)
- Storage temperature: -25 to 70C (-13 to 158°F)
- Power requirements: +5 V +/- 5% 400 mA (typical)

## Other Reference Materials

### Web Site

- [www.mysst.com/cards/devicenet/dn.asp](http://www.mysst.com/cards/devicenet/dn.asp)

## Related DeviceNet Products

- Network Interface Cards connect various computer bus formats to industrial networks
- Network Diagnostic and Configuration Software
- Network Gateways
- PLC Network Modules connect programmable controllers to industrial networks and I/O devices
- Data Servers include OPC and DDE Servers

## Certifications

- DeviceNet Conformance Tested

## Affiliations

- Active member of the Open DeviceNet Vendor Association (ODVA)

## Ordering Information

- Order part number 5136-DNP-CPCI

## Also available from SST:

**Gateways  
PLC Modules  
Data Servers  
Interface Cards  
Embedded Solutions  
I/O Simulation Software  
Diagnostic and Configuration Software**

[www.mysst.com](http://www.mysst.com)

EDNPCPCI

October 2002

50 Northland Road  
Waterloo, Ontario  
Canada N2V 1N3  
Tel: 519-725-5136  
Fax: 519-725-1515  
Sales@mysst.com

**W Woodhead Connectivity**  
applicom • Brad Harrison • mPm • NetAlert • RJ-Link • SST  
THE GLOBAL LEADER IN INDUSTRIAL COMMUNICATIONS AND CONNECTIVITY